



SP4805

**48V**  
**Wall-mounted**  
**Residential**  
**Energy**  
**Storage**

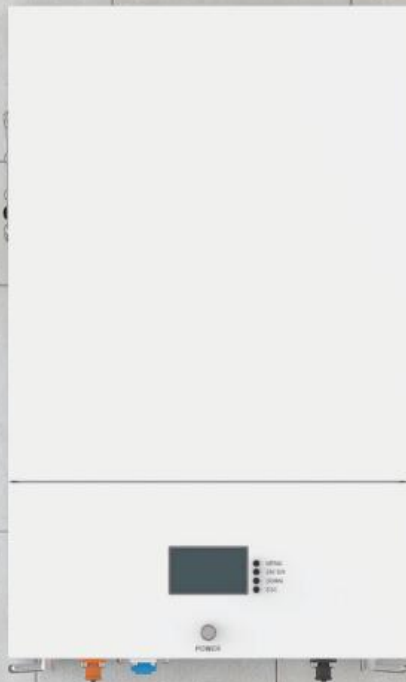

# SP4805

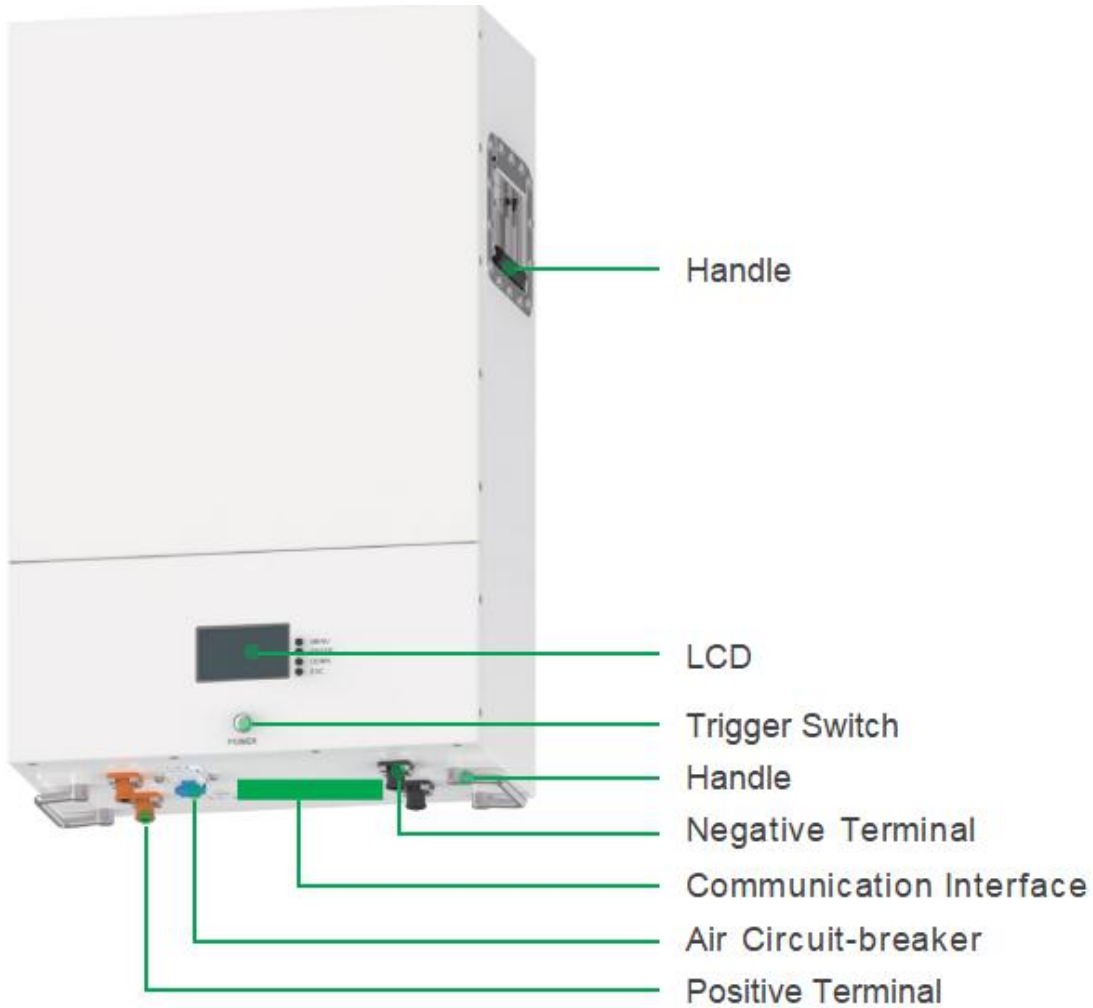

# SP4805

Product model	ESS - SP4805	ESS - SP4807	ESS - SP4810
Rated capacity	100Ah	150Ah	200Ah
Rated voltage	51.2V		
Working voltage	40~58.4V		
Battery type	LFP		
Communication mode	CAN/RS232/RS485		
Constant charging current	50A		
Constant discharging current	100A		
Peak charging current	100A		
Peak discharging current	110A (3S)		
Max.Number of parallel	16P		
IP rating	IP54		
Charging temperature range	0~60°C		
Discharging temperature range	-20~60°C		
Cooling method	Natural cooling		
Display	LCD		
Dimensions (L*W*H)	443.5*410.6*231mm	443.5*410.6*231mm	651*410.6*231mm
Weight	40kg	60kg	80kg